

Elegant LED safety luminaires with powder-coated cover designed for tool-less recessed ceiling installation.

**Technical data**

- Material :** Stainless steel A4 brushed / powder-coated steel-sheet
- Illuminant :** LEDs
- Nominal voltage DC :** 24V ± 20%
- Nominal current :** 80 mA
- Terminals :** 2.5 mm<sup>2</sup> for feed-through wiring
- Temperature ta :** -15°C... +40°C
- Protection category :** IP20
- Protection class :** III


acc. to DIN EN 60598-1, DIN EN 60598-2-22, DIN 4844-1 and DIN EN 1838

Housing-colours	Part.no.	Colour code
White (RAL 9016)	...	L04
Stainless steel	...	L30
Special colours	...	L99

Attach the colour code to part number e.g. **800 014 LXX**


**SN 9104.1-11 LED round**  
Art. no. 809 400

Recessed ceiling mounting

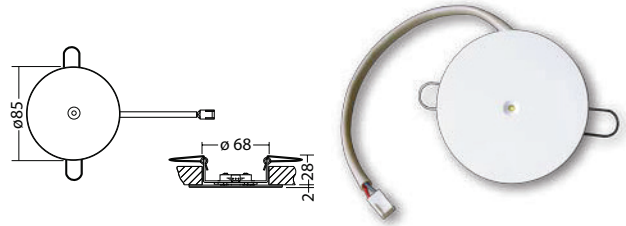


**SN 9104.1-11 LED squared**  
Art. no. 809 401

Recessed ceiling mounting

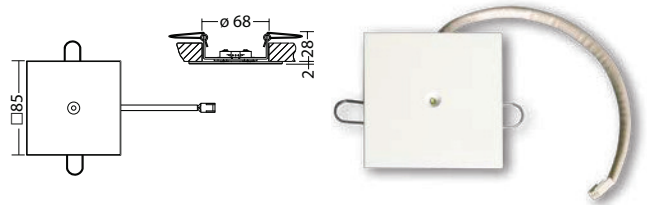

**Supply unit**  
Art. no. 890 613

Accessory

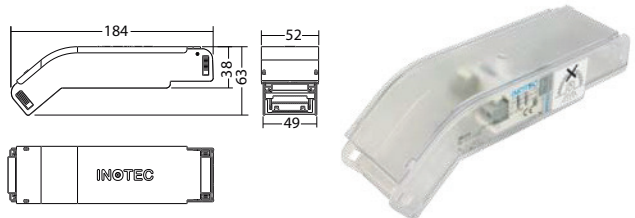

Ceiling mounting			
Mounting height [m]	[m]	[m]	[m]
2.5	2.6	6.6	
3.0	2.7	7.2	
3.5	2.6	7.5	
4.0	2.5	7.7	
4.5	2.2	7.6	
5.0	1.8	7.4	
5.5	1.1	7.2	

Minimum illumination 1.25 Lux (middle of escape route)  
Measuring plane 2cm above floor level

