

Safety luminaire for especially highlighted areas according to DIN EN 1838. Luminaire with separately switchable, backlit pictograph, elegant housing and optional side cable entry.


Technical data

- Viewing distance :** 18 m
 - Material :** Polycarbonate white
 - Illuminant :** LEDs
 - Nominal voltage AC :** 230V ± 10%, 50/60Hz
 - Nominal voltage DC :** 220V ± 20%
 - Nominal current :** 43 mA
 - Power consumption :** 13.2 VA
 - Terminals :** 2.5 mm² for feed-through wiring
 - Temperature ta :** -15°C... +40°C
 - Protection category :** IP40
 - Protection class :** II
- acc. to DIN EN 60598-1, DIN EN 60598-2-22, DIN 4844-1 and DIN EN 1838

Housing-colours	Part.no.	Colour code
Special colours	...	L99
Attach the colour code to part number e.g.	800 014	LXX

Wall mounting Mounting height [m]	1.0m		2.0m		3.0m	
	1.0m	2.0m	2.3	5.7	1.8	5.2
2.0	2.8	7.0	2.8	7.2	2.3	6.8
2.5	3.0	7.4	3.0	7.8	2.6	7.4
3.0	3.1	8.0	3.1	8.4	2.7	8.1
3.5	3.2	8.5	3.2	8.7	2.8	8.5
4.0	3.1	8.7	3.1	9.1	2.8	8.8
4.5	3.0	9.0	3.0	9.3	2.7	9.0
5.0	2.8	9.0	2.8	9.3	2.5	9.1
5.5	2.6	9.0	2.6	9.3	2.0	9.1
6.0	2.2	8.8	2.1	9.2	1.5	8.9


Minimum illumination 1.25 Lux (middle of escape route)
 Measuring plane 2cm above floor level



SNP 2004.1 LED 230V

Art.no. 802 145.1V - J/SV

Wall mounting

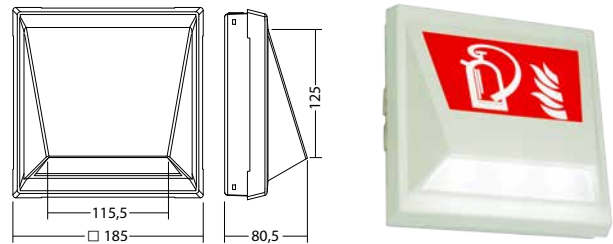

Safety signs

optional

