

Safety luminaire for especially highlighted areas according to DIN EN 1838. Luminaire with separately switchable, backlit pictograph, elegant housing and optional side cable entry.

Technical data

- Viewing distance :** 18 m
- Material :** Polycarbonate white
- Illuminant :** LEDs
- Nominal voltage DC :** 24V ± 20%
- Nominal current :** 265 mA
- Terminals :** 2.5 mm² for feed-through wiring
- Temperature ta :** -15°C... +40°C
- Protection category :** IP40
- Protection class :** III

acc. to DIN EN 60598-1, DIN EN 60598-2-22, DIN 4844-1 and DIN EN 1838

Luminaire with two separate addresses for individual monitoring of the safety luminaire and the backlit pictograph!


Housing-colours	Part.no.	Colour code
Special colours	...	L99

Attach the colour code to part number e.g. **800 014 LXX**

SNP 2004.1 LED 24V

Art. no. 810 218.1V

Wall mounting

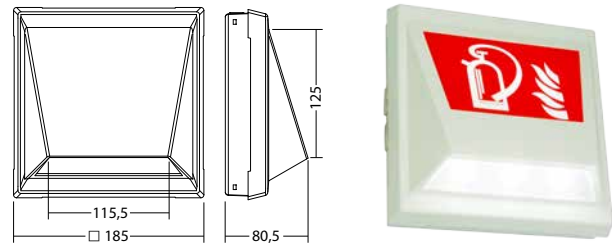

Safety signs

optional



Eye douche

Defibrillator

First Aid



Special pictograms

Extinguisher

Fire hose

Wall mounting			
Mounting height [m]	[m]	[m]	[m]

	Distance to middle of escape route					
	1.0m		2.0m		3.0m	
1.0	2.2	5.4	2.3	5.7	1.8	5.2
2.0	2.8	7.0	2.8	7.2	2.3	6.8
2.5	3.0	7.4	3.0	7.8	2.6	7.4
3.0	3.1	8.0	3.1	8.4	2.7	8.1
3.5	3.2	8.5	3.2	8.7	2.8	8.5
4.0	3.1	8.7	3.1	9.1	2.8	8.8
4.5	3.0	9.0	3.0	9.3	2.7	9.0
5.0	2.8	9.0	2.8	9.3	2.5	9.1
5.5	2.6	9.0	2.6	9.3	2.0	9.1
6.0	2.2	8.8	2.1	9.2	1.5	8.9

Minimum illumination 1.25 Lux (middle of escape route)
Measuring plane 2cm above floor level

